
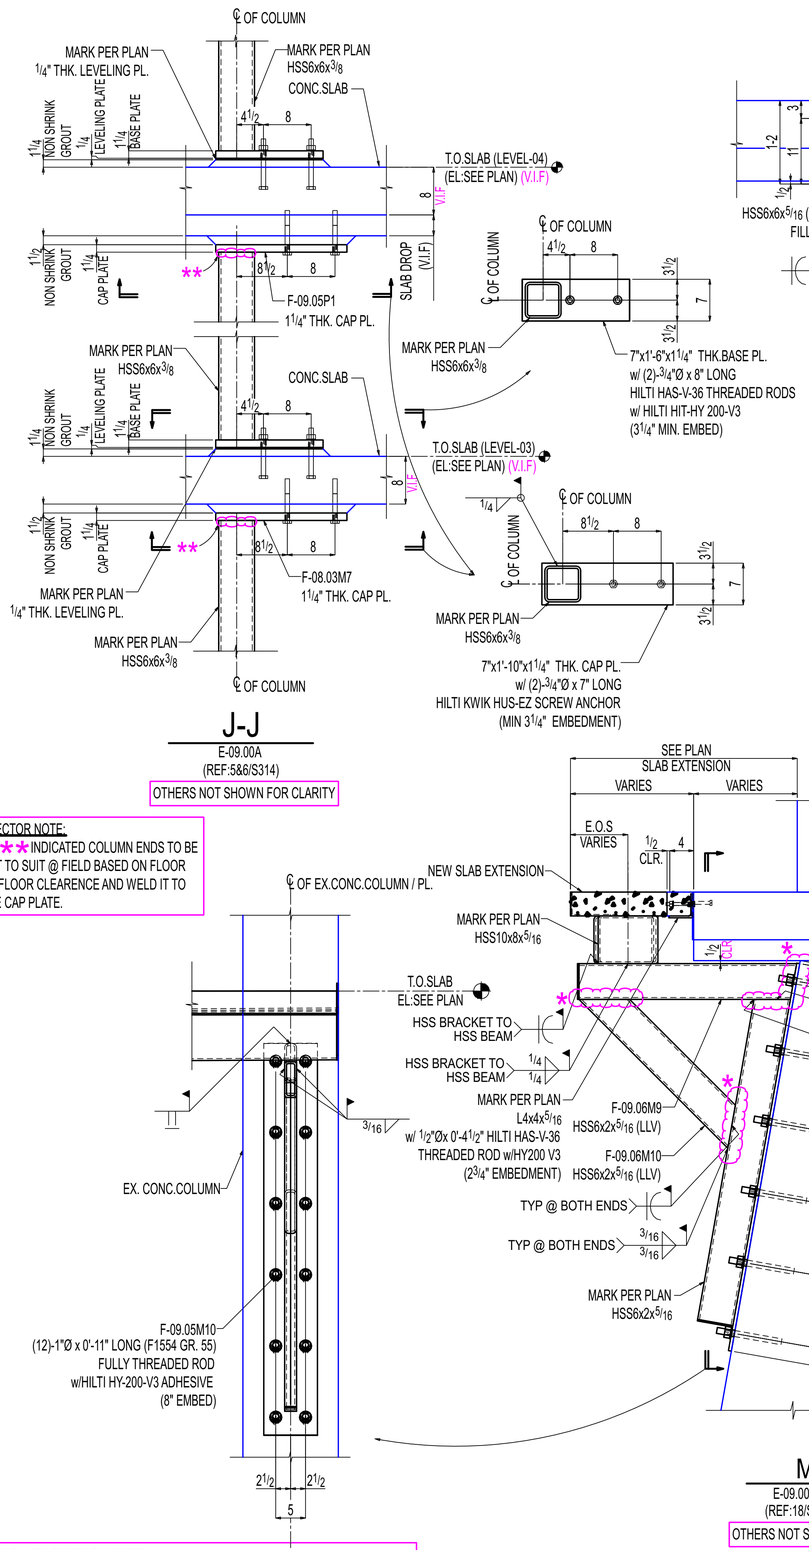



J-J

E-09.00A
(REF:5&6/S314)

OTHERS NOT SHOWN FOR CLARITY

ERECTOR NOTE:
ALL ** INDICATED COLUMN ENDS TO BE CUT TO SUIT @ FIELD BASED ON FLOOR TO FLOOR CLEARENCE AND WELD IT TO THE CAP PLATE.

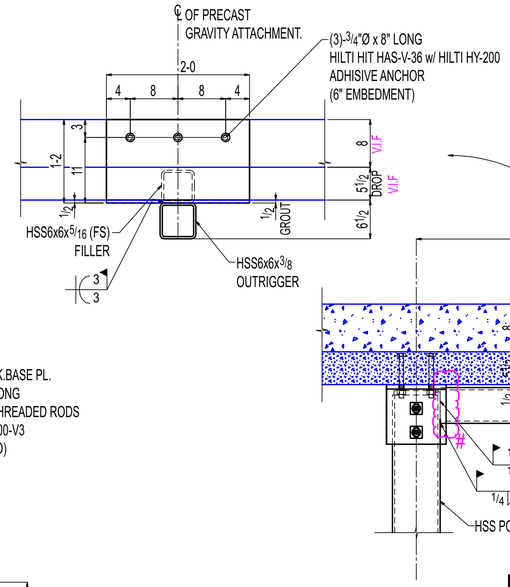

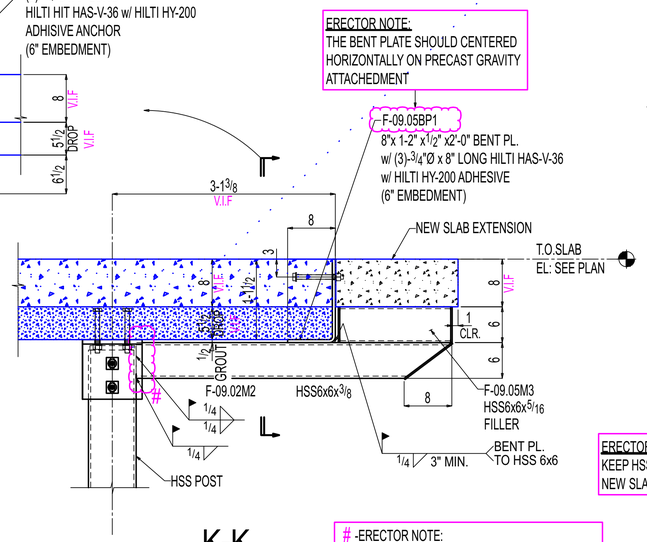


K-K

E-09.00A
(REF: 7/S315)

OTHERS NOT SHOWN FOR CLARITY

-ERECTOR NOTE:
FIELD CUT HSS6x6 ENDS TO SUIT HSS8x8 COLUMN.

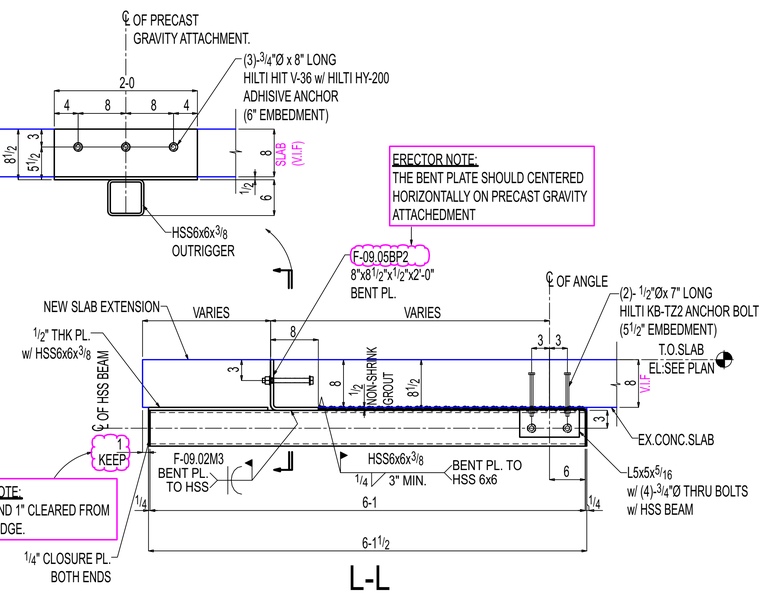

L-L

E-09.00
(REF: 3/S316)


OTHERS NOT SHOWN FOR CLARITY

SHOP / ERECTOR NOTE:
LOCATE EXISTING REBAR PRIOR TO FABRICATION OF PLATE. DO NOT DRILL THROUGH REBAR.


M-M

E-09.00 & E-09.00A
(REF:18/S205 & 9/S316)

OTHERS NOT SHOWN FOR CLARITY

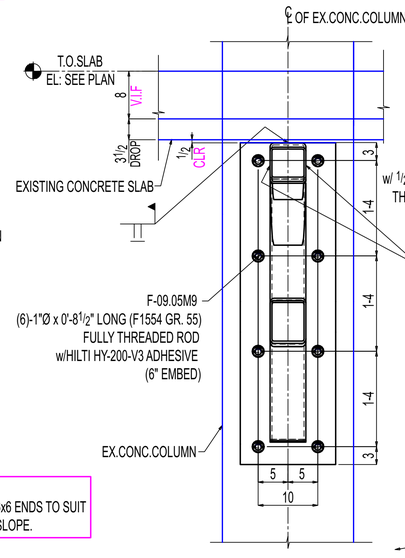

ERECTOR NOTE:
* - FIELD CUT HSS6x6 ENDS TO SUIT EXISTING COLUMN SLOPE.

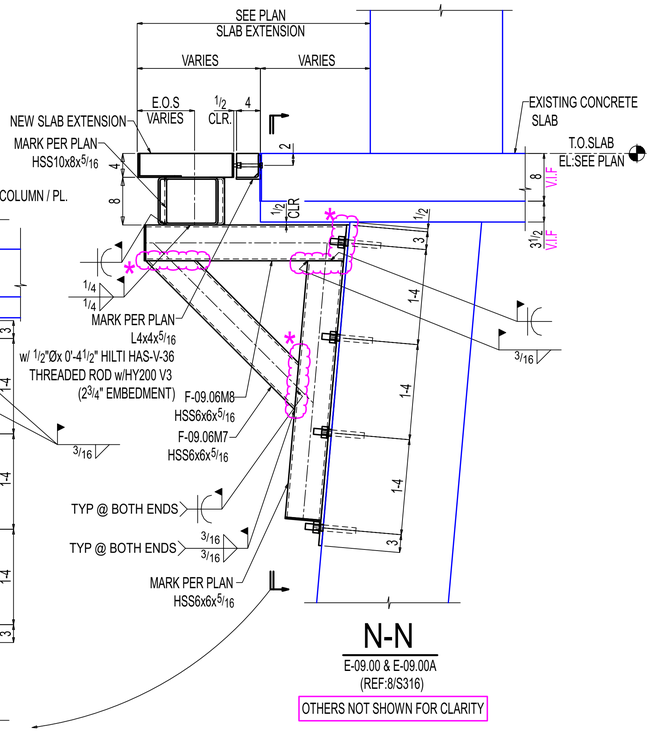

N-N

E-09.00 & E-09.00A
(REF:8/S316)

OTHERS NOT SHOWN FOR CLARITY

General Notes

*Structural steel shall conform to ASTM-A992.
*Structural SQR/RND.tubing conform to ASTM A500 Grade C
*Pipe shall conform to ASTM A53, Grade B.
*Channels, Angles and plates shall conform to A36.
*All bolts shall be 3/4" High strength in accordance with ASTM A325 (UNO)
*Welding Electrodes for Carbon steel :E70xx

# of Copies	Revision/ Issue	Destination	Date
4	0	For Construction	11-14-2025
3	C	For Re-Approval	10-24-2025
2	B	For Re-Approval	09-19-2025
1	A	For Approval	02-25-2025

IRON FABRICATION SERVICES, LLC.

3029 M. Street, NW, Suite 202
Washington, DC 20007
Tel: 202-800-5599
Fax: 202-478-0303

Project Name and Address
MARYLAND AVENUE

Location: **1250 MARYLAND AVENUE SW WASHINGTON, DC 20024**

Contractor:
BALFOUR BEATTY

Approved for Fabrication by:	Signature

Contract # **224009** | Drawing # **E-09.03**

Contract Item: **LEVEL-03 SLAB EXTENSION**

Ref: **SOW-09: 3,4,5&6 / S307**

Date **01/ 20/ 2025**

Scale VARIES

Drawing Title: **SOW #09 LEVEL-03 NEW SLAB EXTENSION SUPPORT SECTIONS**