
BILL OF MATERIAL


LINE #	QTY TOTAL	PC MARK	DESCRIPTION	LENGTH	REMARKS	WEIGHT TOTAL	ADVANCE MILL #
	ONE	F-13.02C1	COLUMN			329	
	1	F-13.02C1	HSS6x6x3/8	10 4	S2E A500C	284	
	1	pl1976	PL1/4x7	1 6	A36	45	
			FIELD BOLTS				
	2		3/4 Dia HILTI HAS V-36	0 8	+1HD WASH		
			w/ HILTI HY-200 V3		(3 1/4" EMBEDMENT)		
			ADHESIVE				
	ONE	F-13.02B1	BEAM			810	
	1	F-13.02B1	HSS10x8x5/16	17 6 7/16	A500C	633	
	1	pl364	PL1/4x7 1/8	8 9 1/8	A36	53	
	2	pl3649	PL1/4x8	0 10	A36	11	
	1	pl328	PL1/4x5 1/8	8 8 15/16	A36	57	
	1	fb13	FL1/4x3 3/4	8 8 3/4	A36	28	
	1	fb12	FL1/4x3 3/4	8 8 5/8	A36	28	

Total weight : 1139

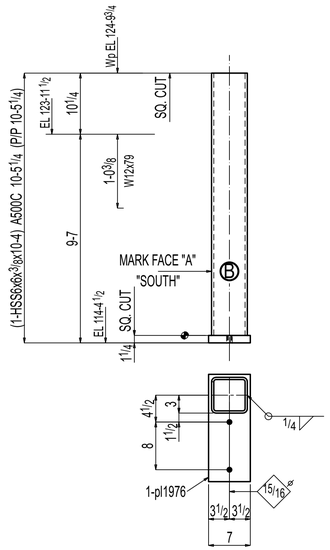

ONE COLUMN F-13.02C1

AT GRID:
EE & A

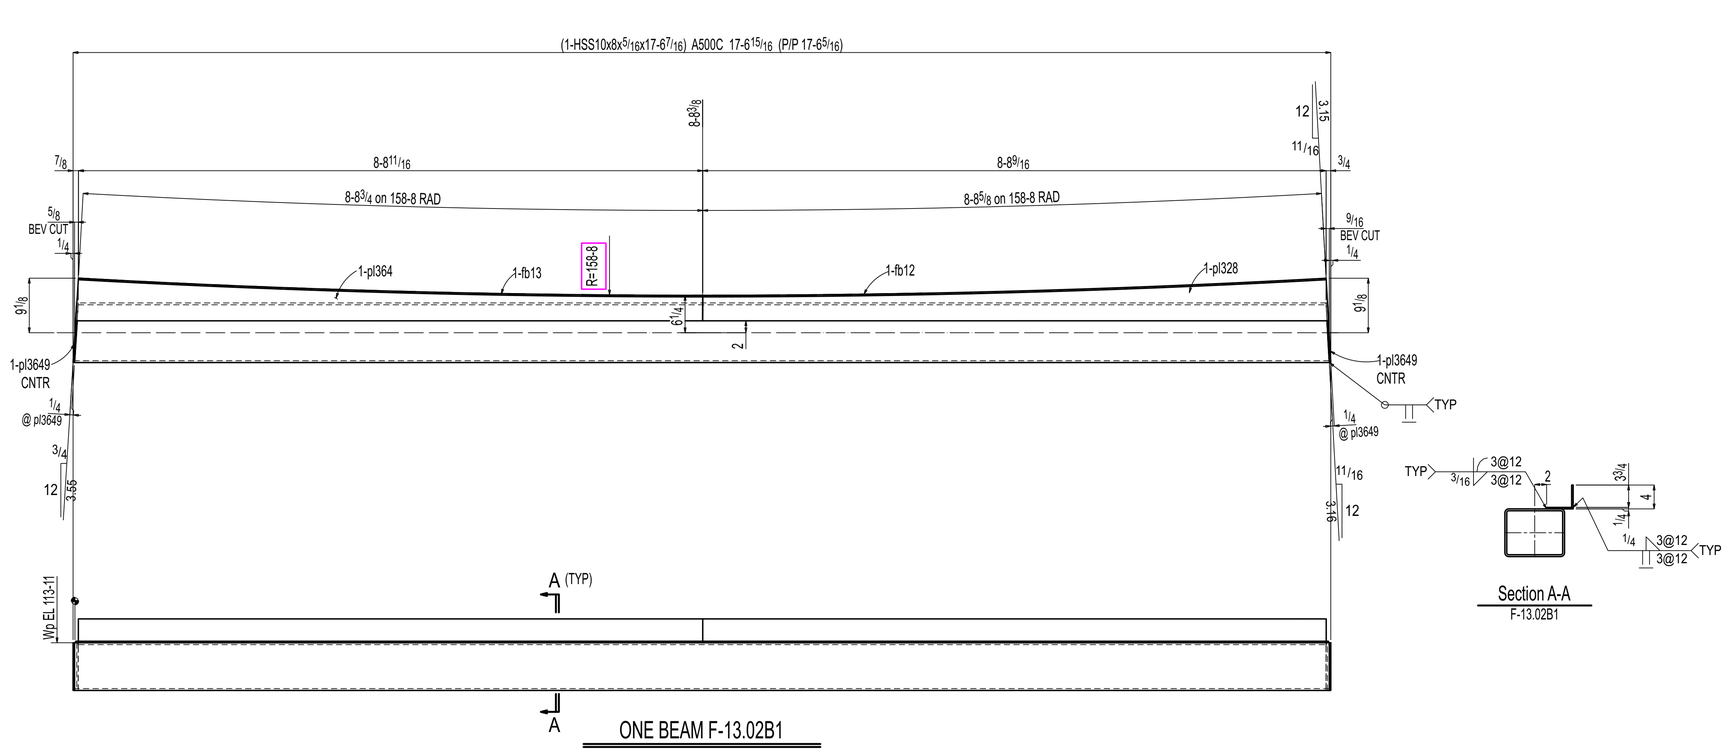

ONE BEAM F-13.02B1

Section A-A
F-13.02B1

PAINT :NO PAINT
PREPARATION :SSPC-SP3

General Notes

*Structural steel shall conform to ASTM-A992.
*Structural SQR/RND.tubing conform to ASTM A500 Grade C
*Pipe shall conform to ASTM A53, Grade B.
*Channels, Angles and plates shall conform to A36.
*All bolts shall be 3/4" High strength in accordance with ASTM A325 (UNO)
*Welding Electrodes for Carbon steel :E70xx

# of Copies	Revision/ Issue	Destination	Date
5	0	For Fabrication	11-17-2025
4	D	For Re-Approval	10-24-2025
3	C	For Re-Approval	09-19-2025
2	B	For Re-Approval	06-23-2025
1	A	For Approval	02-25-2025

IRON FABRICATION SERVICES, LLC.

3029 M. Street, NW, Suite 202
Washington, DC 20007
Tel: 202-800-5599
Fax: 202-478-0303

Project Name and Address
MARYLAND AVENUE

Location: **1250 MARYLAND AVENUE SW WASHINGTON, DC 20024**

Contractor:
BALFOUR BEATTY

Approved for Fabrication by:	Signature

Contract # **224009** Drawing # **F-13.02**

Contract Item: **COLUMN & BEAM**

Ref:
SOW - 13: E-13.00 - E-13.02

Date **01/ 23/ 2025**

Drawing Title: **COLUMN & BEAM DETAIL**

Scale VARIES